

OEM



RECOMMENDED TORQUE SETTINGS

Below are recommended torque settings for our hydraulic and mechanical brake systems. For more information and 'How to Video's' please visit www.clarks.bike

Fitting Position	Fitting Size	Torque Setting
Rotor Bolt	Torx T25	6.2 NM
Calliper to bracket bolt	M6 bolt	11-13 NM
Lever bracket bolt	M6 bolt	6-8 NM
Bracket to frame bolt	M6 bolt	11-13 NM
Disc pad retaining pin	-	1.5-2 NM
Lever hose compression nut	8mm	9 NM
C-Jet	-	6-8 NM

www.clarks.bike



SERVICE & FITTING VIDEOS

We have an extensive collection of videos, demonstrating all the common service procedures carried out on our brake range.

Please visit
clarks.bike/how-to-videos.html




SERVICE & REPAIR PARTS

We offer an extensive range of spare service and repair parts for all our hydraulic brake systems.

Please visit
clarks.bike/order-spare-parts.html



CLARKS
EXCEED YOUR LIMITATIONS

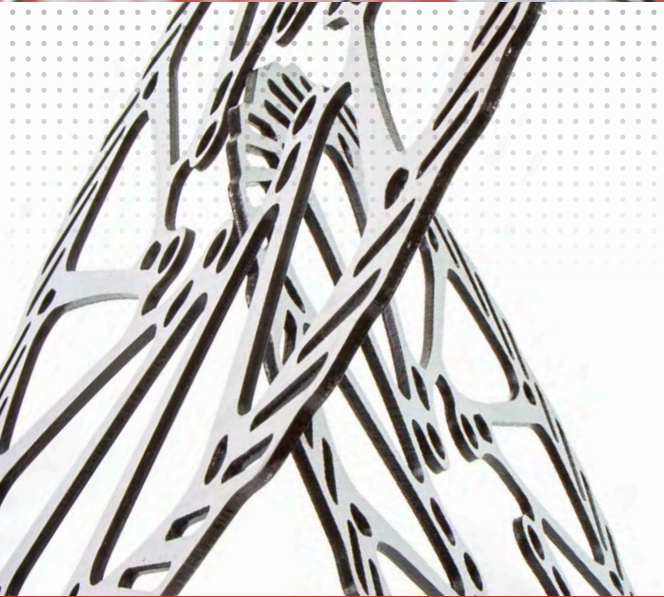

RECOMMENDED ROTOR MAINTENANCE

Clarks rotor thickness is 1.80mm to 1.88mm
To avoid rotor failure, rotors should be replaced when the thickness is worn down to 1.6mm or less, or after 2 years. Whichever comes first.

RECOMMENDED TORQUE SETTINGS

Fitting Position	Fitting Size	Torque Setting
Rotor Bolt	Torx T25	6.2 NM

SERVICE & FITTING VIDEOS

We have an extensive collection of videos, demonstrating all the common service procedures carried out on our brake range.


Please visit
clarks.bike/how-to-videos.html

SERVICE & REPAIR PARTS

We offer an extensive range of spare service and repair parts for all our hydraulic brake systems.

Please visit
clarks.bike/order-spare-parts.html

BOLT TIGHTENING SEQUENCE



www.clarks.bike



CLARKS
EXCEED YOUR LIMITATIONS